
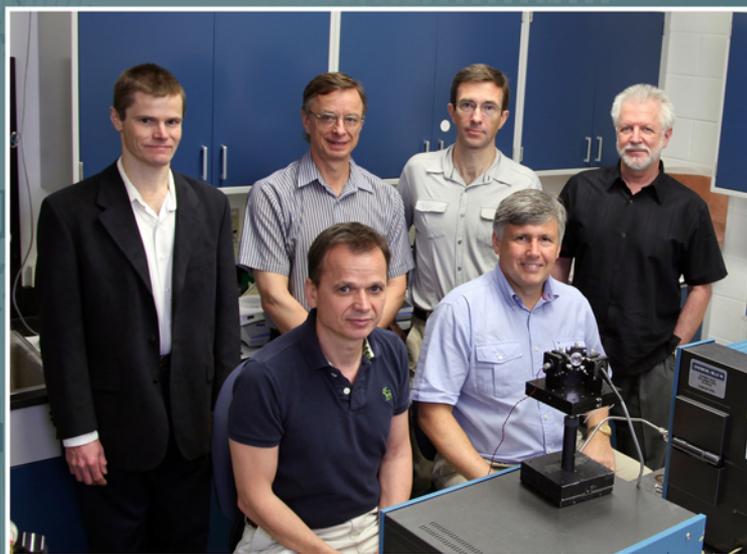


Hydrogen safety sensor based on nanostructured palladium cantilevers

The sensor responds to the presence of hydrogen gas in environments with varying temperature (0 to 30 °C) and humidity as well as gas species that interfere with the operation of most other palladium-based sensors.

Developed and jointly submitted by
 Oak Ridge National Laboratory
 The University of Tennessee, Knoxville

Sponsored by
 US Department of Energy Hydrogen and Fuel Cells Program and conducted in part at the Center for Nanophase Materials Sciences, which is sponsored at ORNL by the DOE Office of Basic Energy Sciences

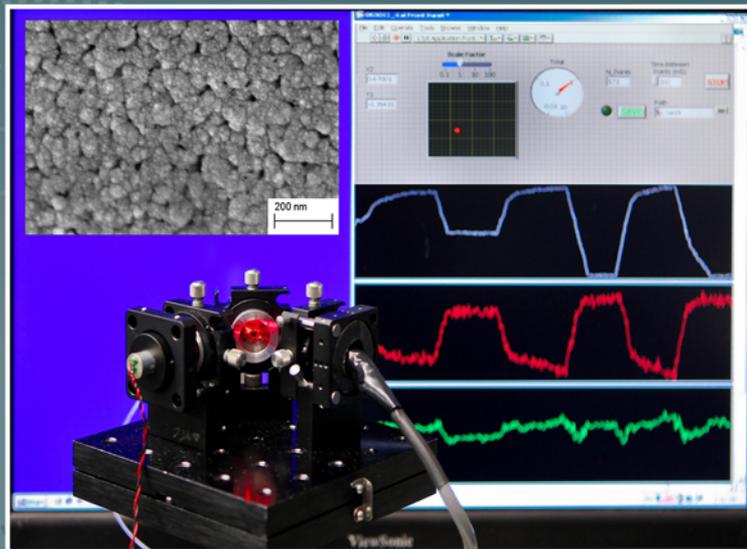

Recipients (Back row, l-r): James Patton, Scott Hunter, Nickolay Lavrik, Michael Sepaniak
(l-r): Panos Datskos, Barton Smith