

ORNL/TM-2016/185
CRADA/NFE-15-05698

Feasibility and Scaling of Composite Based Additive Manufacturing



**CRADA FINAL REPORT
NFE-15-05698**

**Approved for public release.
Distribution is unlimited.**

David Nuttall
Xun Chen
Vlastimil Kunc
Lonnie Love

April 27th 2016

DOCUMENT AVAILABILITY

Reports produced after January 1, 1996, are generally available free via US Department of Energy (DOE) SciTech Connect.

Website <http://www.osti.gov/scitech/>

Reports produced before January 1, 1996, may be purchased by members of the public from the following source:

National Technical Information Service
5285 Port Royal Road
Springfield, VA 22161
Telephone 703-605-6000 (1-800-553-6847)
TDD 703-487-4639
Fax 703-605-6900
E-mail info@ntis.gov
Website <http://www.ntis.gov/help/ordermethods.aspx>

Reports are available to DOE employees, DOE contractors, Energy Technology Data Exchange representatives, and International Nuclear Information System representatives from the following source:

Office of Scientific and Technical Information
PO Box 62
Oak Ridge, TN 37831
Telephone 865-576-8401
Fax 865-576-5728
E-mail reports@osti.gov
Website <http://www.osti.gov/contact.html>

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

Energy & Transportation Science Division

Feasibility and Scaling of Composite Based Additive Manufacturing

David Nuttall, ORNL
Xun Chen, ORNL
Vlastimil Kunc, ORNL
Lonnie Love, ORNL

Date Published: April 27th 2016

Prepared by
OAK RIDGE NATIONAL LABORATORY
Oak Ridge, Tennessee 37831-6283
Managed by
UT-BATTELLE, LLC
for the
US DEPARTMENT OF ENERGY
Under contract DE-AC05-00OR22725

Approved for Public Release

CONTENTS

	Page
TABLE OF CONTENTS	iv
LIST OF FIGURES	v
ACKNOWLEDGEMENTS	vi
ABSTRACT	1
1. PHASE I SCOPE of WORK: Composite Tooling Manufacture / Evaluation	2
1.1. Background	2
1.2. Prototype Equipment Process	3
1.3. Tool Selection (ORNL)	3
1.4. Tool Manufacture (IO)	4
1.5. Tool Evaluation (ORNL)	6
2. Results Phase I.....	9
Appendix A:	
Anticipating a PHASE II, the following Scope of Work summarizes the intended efforts PROPOSAL FOR PHASE II SCOPE of WORK:	10
References	11

LIST OF FIGURES & TABLES

FIGURE	DESCRIPTION	PAGE
1	Impossible Objects Builds	2
2	Prototype Assembly Machine	3
3	Representative Pick & Place Equipment	3
4	Initial Sample Tool, as Drawn	4
5	Sheet Loading	5
6	Printing and Sheet Punch	5
7	Printed Mat Exiting Vacuum Station	5
8	Stacking w/ Precision Punched Holes	5
9	Compression Jig w/ Baked Part Removed	5
10	Sample Part In Clean-up	5
11	Finished Tool Part for CRADA Work	5
12	Screenshot of CT Scan Output, Inclusion Pointed Out in Each Dimension	6
13	Hydroformer Post Cycle	7
14	Part As-Pressed	7
15	Close-up of Form Over Tool	8
16	Close-up of Tool after Forming	8
17	12 mm Sample: Strain Curve x-Direction	8
18	12 mm Sample: Strain Curve y-Direction	8
19	12 mm Sample: Strain Curve z-Direction	8
TABLE	DESCRIPTION	PAGE
1	Dimensional Analysis Pre-Testing	7
2	Dimensional Analysis Post-Testing	7
3	CTE Analysis	8

ACKNOWLEDGEMENTS

This CRADA NFE-15-05575 was conducted as a Technical Collaboration project within the Oak Ridge National Laboratory (ORNL) Manufacturing Demonstration Facility (MDF) sponsored by the US Department of Energy Advanced Manufacturing Office (CPS Agreement Number 24761). Opportunities for MDF technical collaborations are listed in the announcement “Manufacturing Demonstration Facility Technology Collaborations for US Manufacturers in Advanced Manufacturing and Materials Technologies” posted at <http://web.ornl.gov/sci/manufacturing/docs/FBO-ORNL-MDF-2013-2.pdf>. The goal of technical collaborations is to engage industry partners to participate in short-term, collaborative projects within the Manufacturing Demonstration Facility (MDF) to assess applicability and of new energy efficient manufacturing technologies. Research sponsored by the U.S. Department of Energy, Office of Energy Efficiency and Renewable Energy, Advanced Manufacturing Office, under contract DE-AC05-00OR22725 with UT-Battelle, LLC.

ABSTRACT

Engineers and Researchers at Oak Ridge National Lab's Manufacturing Demonstration Facility (ORNL MDF) collaborated with Impossible Objects (IO) in the characterization of PEEK infused carbon fiber mat manufactured by means of CBAM – composite-based additive manufacturing, a first generation assembly methodology developed by Robert Swartz, Chairman, Founder, and CTO of Impossible Objects.[1] The first phase of this project focused on demonstration of CBAM for composite tooling. The outlined steps focused on selecting an appropriate shape that fit the current machine's build envelope, characterized the resulting form, and presented next steps for transitioning to a Phase II CRADA agreement. Phase I of collaborative research and development agreement NFE-15-05698 was initiated in April of 2015 with an introduction to Impossible Objects, and concluded in March of 2016 with a visitation to Impossible Objects' headquarters in Chicago, IL. Phase II as discussed herein is under consideration by Impossible Objects as of this writing.

1. PHASE I SCOPE of WORK: Composite Tooling Manufacture / Evaluation

1.1 BACKGROUND

Impossible Objects LLC is a start-up company located on the northern suburb of Chicago in Northbrook, IL. The company was officially chartered by Robert Swartz in (2013), after independently financing his ventures into the world of composites. “The company’s vision is founded in researching composite materials to produce stronger, high precision, geometrically complex parts, with a wider variety of materials, faster than other methods that will give a design and manufacturing advantage relative to current methods.[2] *Today, most other 3D printing technologies are limited to producing prototypes of thermoplastics (polymers) and certain metals that are significantly inferior to parts made through traditional manufacturing methods such as injection molding, machining and die-casting. Impossible Objects enables the production of strong yet lightweight, geometrically complex end use parts using additive manufacturing technology.*”[3] The world’s first and only technology for additively manufacturing 3D objects from reinforced composites using carbon fiber, Kevlar, or glass fiber[4] is the subject review of this CRADA. IO approached ORNL’s Manufacturing Demonstration Facility in early 2015 to discuss opportunities for material characterization and process improvements. Examples of objects produced thus far are found in figure 1, including complex geometries such as the nautilus gear, propeller blades, threaded rod & bolt, airfoil, brackets, etc. Images of the prototype machine are found in figures 2 and 3.



Figure 1 Impossible Objects Builds



Figure 2 Prototype Assembly Machine

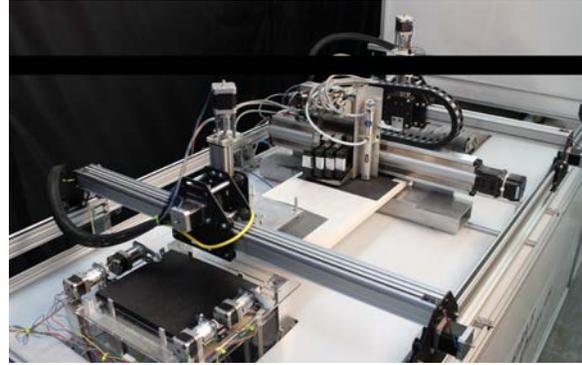


Figure 3 Representative Pick & Place Equipment

To kick-off the CRADA activity in April of 2015, IO and ORNL held a teleconference followed by a visit in Knoxville to introduce the participants, determine strategy, establish the 3D printed object's size, and plan a general schedule for the project. In that discussion ORNL's focus was to select an appropriate geometric shape that would challenge but offer a reasonable level of success. The selection of tests focused on the physical properties (density, dimension control, CTE) and survivability under load. At the same time, Impossible Objects was further developing their equipment, and thus refining the process. The tooling produced would be developed using both the advancing equipment design for pick & place as well as mat wet-out. The remaining steps included hand powdering, vacuuming, and assembly processes.

1.2 PROTOTYPE EQUIPMENT PROCESS (IO)

The assembly process consists of the following six steps[5]:

- ◆ Pick & place loaded fiber sheet – fiber sheets are per laded in stack form at the entry point of the machine
- ◆ Spray Binder – spray proprietary binder liquids utilizing inkjet technology
- ◆ Polymer Deposition – cascade polymer powder (PEEK, HDPE, Nylon) onto pre-wetted fiber sheet
- ◆ Excess Polymer removal – vacuum removal of excess material
- ◆ Stack Sheets – assemble & align the fiber sheet stack in order, heat to polymer melting temperature
- ◆ Abrade un-bound material – mechanically and / or chemically remove un-bonded sections within the 3D stack for final net shape

Photos of these process steps may be found in Section 1.4 Tool Manufacturing.

1.3 TOOL SELECTION (ORNL)

ORNL responded to the request for a shape that would be exposed to various testing procedures. The form chosen was a rectangular box approximately the size of a deck of cards, with rounded corners. Additionally, one of the larger flat faces included a 3D contour in both x and y directions, as seen in figure 4. The shape would provide enough features for form following in non-destructive test mode and other testing as well as provide samples large enough to evaluate cross sections in each of the part's axial directions.

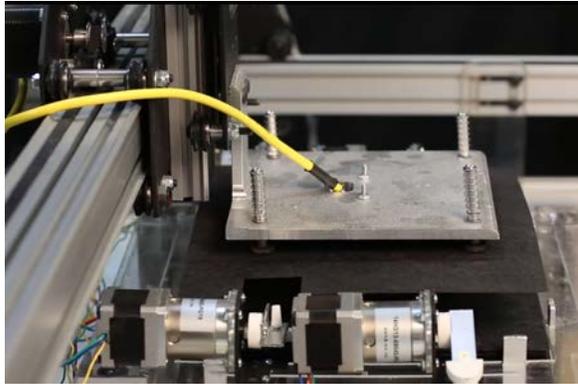


Figure 5 Sheet Loading



Figure 6 Printing and Sheet Punch

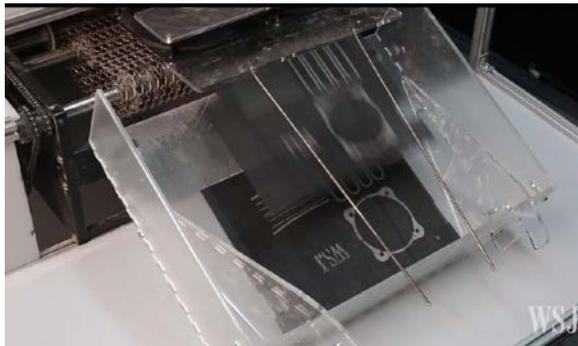


Figure 7 Printed Mat Exiting Vacuum Station



Figure 8 Stacking w/ Precision Punched Holes



Figure 9 Compression Jig w/ Baked Part Removed



Figure 10 Sample Part In Clean-up



Figure 11 Finished Tool Part for CRADA Work

1.5 TOOL EVALUATION (ORNL)

As mentioned in the background review, testing focused on the physical properties of density, dimension control, CTE, and survivability under load. Density was determined thru CT scans, courtesy of Carl Zeiss Industrial Metrology, LLC. No voids were detected. A single inclusion was observed in the scan, thus the indicating the part was fully dense (figure 12).

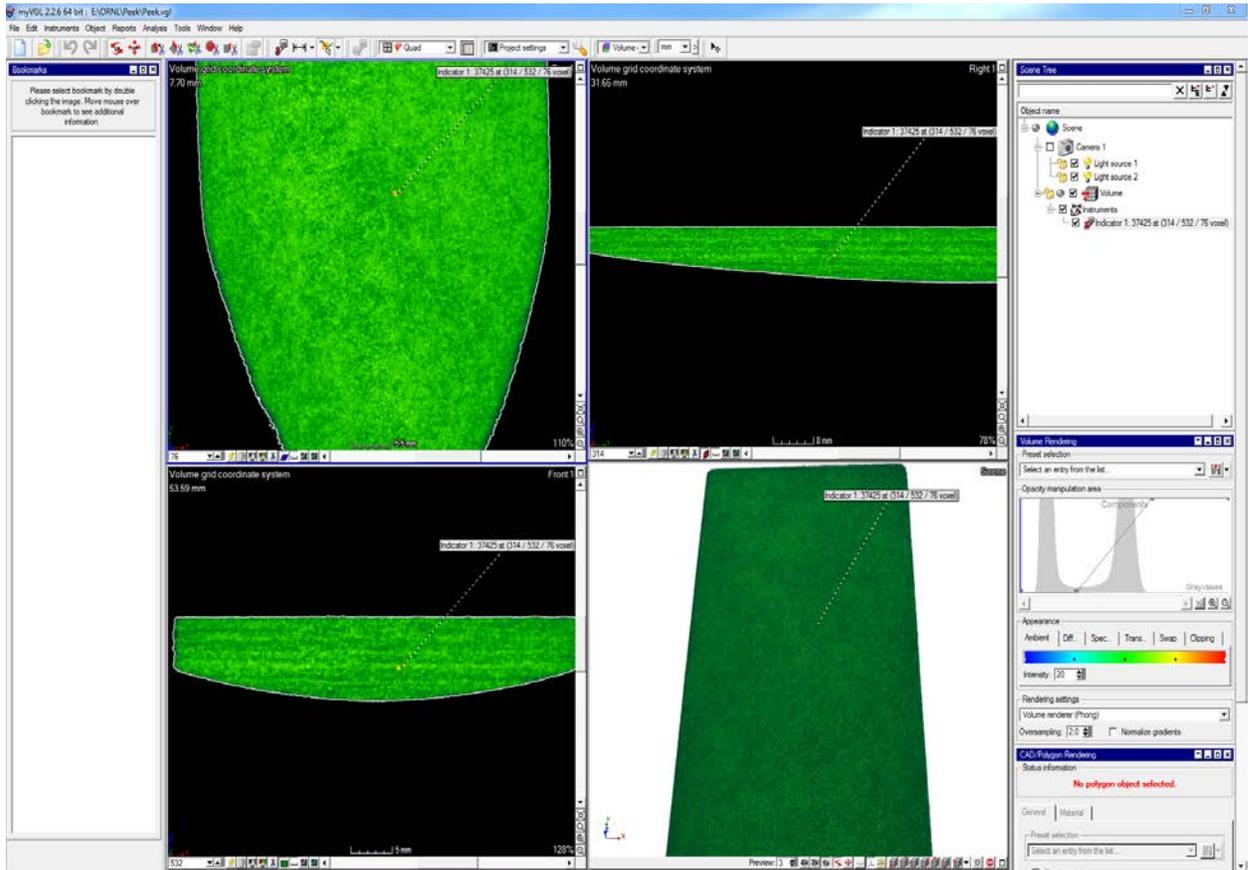


Figure 12 Screenshot of CT Scan Output, Inclusion Pointed Out in Each Dimension

Dimensional control was measured on a gross scale, employing calipers to capture the X, Y, Z_{Top}, and Z_{Bottom}, and diagonal measurements of the sample. It was determined that the dimensional control was within half a percent in both the X and Y dimensions. Noting that Impossible Objects was further developing their equipment, and understanding that the tool was manufactured by means of hand-powdering and vacuuming, the z-height experienced a lesser control, up to 28% delta from design. This divergence was due principally to the volume of polymer, the degree of compression applied, and the amount of polymer ‘blooming’ or phase separation of the material’s components[6]. Results are presented in Table 1.

Table 1 Dimensional Analysis Pre-Testing

Small Scale Part								
Orientation	Measure	Target Dimensions	PEEK Tool Pre Hydro-forming	% Δ	Peek Tool Truncated *	% Δ	Makerbot Sample	% Δ
X	Length: Left	3.490	3.471	-0.544%	3.453	-1.060%	3.426	-1.834%
	Length: Right	3.490	3.471	-0.544%	3.455	-1.017%	3.426	-1.834%
Y	Width: Top	1.960	1.965	0.255%	1.958	-0.102%	1.941	-0.969%
	Width: Bottom	1.960	1.960	0.000%	1.961	0.051%	1.936	-1.224%
Z	Z _B Bottom Thickness	0.540	0.617	14.259%	0.415	N/A	0.542	0.370%
	Z _T Top Thickness	0.300	0.384	27.833%	0.181	N/A	0.328	9.333%
X - Y	Base Diagonal: TL LR	3.900	3.922	0.564%	3.898	-0.051%	3.864	-0.923%
	Base Diagonal: TR LL	3.900	3.917	0.436%	3.886	-0.359%	3.899	-0.026%

*Assembly test piece, Z height intentionally truncated

Impossible Objects is targeting the tooling market in both automotive and aerospace applications, thus survivability under autoclave conditions was under investigation. To simulate these conditions, the part was subjected to seven heat cycles, from ambient to 150°C to ambient, and then exposed to 1000 psi as an extreme. Representation photos are found in figures 13 & 14. Table 2 compares the pre- and post- hydroforming dimensions of the material. Minimal dimensional change was experienced, with photographs in figures 15 & 16 showing no physical change to the surface finish, etc. Note that the tool was dissected to obtain samples for further review, shortening the x-dimension.

Table 2 Dimensional Analysis Post-Testing

Small Scale Part, post Hydroforming				
Orientation	Measure	PEEK Tool Pre Hydro-forming	PEEK Tool Post Hydro-forming	% Δ
X	Length: Left	3.471	N/A	
	Length: Right	3.471	N/A	
Y	Width: Top	1.965	1.959	-0.305%
	Width: Bottom	1.960	1.962	0.102%
Z	Z _B Bottom Thickness	0.617	0.614	-0.486%
	Z _T Top Thickness	0.384	0.388	1.173%



Figure 13 Hydroformer Post Cycle



Figure 14 Part as Pressed



Figure 15 Close-up of Form Over Tool

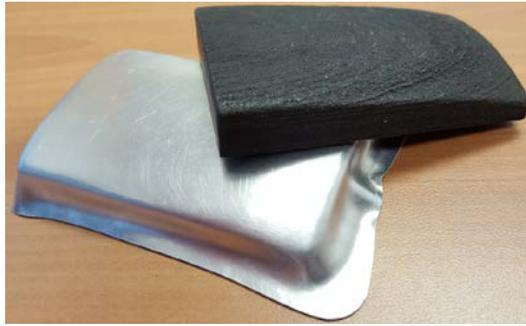


Figure 16 Close-up of Tool after Forming

The last property investigated for the PEEK – Carbon Fiber mat composite was the Coefficient of Thermal Expansion (CTE), measured on ORNL’s main campus using the Thermo-Mechanical Analyzer (TMAQ400), and employing ASTM E831 as a guideline[7].

An independent sample set specifically oriented in the x-, y-, and z- directions, was requested from Impossible Objects for CTE analysis. The target size was 3mm x 3mm x ~12mm in length, for a clear estimation of CTE. Published CTE values of unreinforced PEEK ranges from 4.7 ~ 150 $\mu\text{m}/\text{m}\cdot^\circ\text{C}$ [8] and with carbon fiber fill ranges from 3.00 ~ 110 $\mu\text{m}/\text{m}\cdot^\circ\text{C}$ [9], as found in Matweb’s technical data. As seen in table 3, our test data fell within these parameters. The plots of the three independent directional samples for Strain vs Temperature are posted in figures 17, 18, & 19, within which the Glass Transition Temperature can clearly be identified.

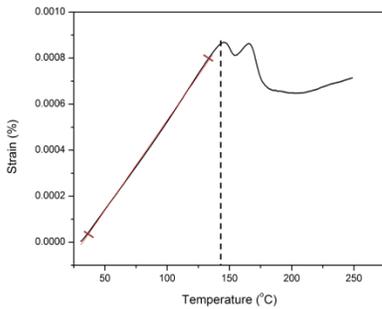


Figure 17 12 mm Sample:
Strain Curve x-Direction

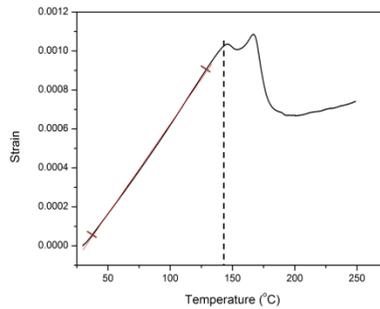


Figure 18 12 mm Sample:
Strain Curve y-Direction

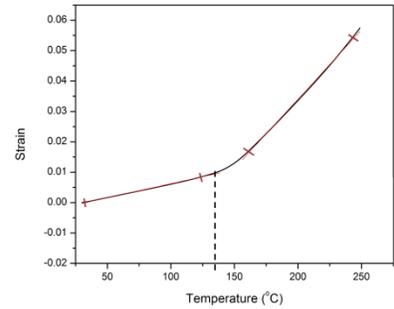


Figure 19 12 mm Sample:
Strain Curve z-Direction

Table 3 CTE Analysis

	x-Direction	y-Direction	z-Direction, pre- T_G	z-Direction, post- T_G
Sample Length L_0 (mm)	11.941	12.024	12.163	
CTE ($\mu\text{m}/\text{m}\cdot^\circ\text{C}$)	7.81	9.24	92.35	455.36
Glass Transition T_G ($^\circ\text{C}$)	142	142	135	

2.0 Summary of Results

The success of the Impossible Objects tool submitted for the first Phase of this CRADA has been greatly encouraging. Understanding that the processes are capable of producing a completely dense part and witnessing the survivability under hydroforming loads gives this process credence to move forward into the realm of actual constructed parts, tools, and compression molds.

The agreement with published data, specifically determining where in the range the CTE values fall, establishes that the tools will be compatible with other composite parts and lead to the option that the CBAM tools will survive autoclave exposure.

As proposed, Phase II will explore the improvements needed to streamline the assembly machine, improve cycle time, and establish a part size maximum geometry. Additional material characteristics will be determined based on the knowledge gained in Phase I.

Appendix A: Anticipating a PHASE II, the following Scope of Work summarizes the intended efforts

PHASE II SCOPE of WORK:

1. Equipment Transfer to Knoxville: Full Scale Manufacturing – IO to emplace a large CBAM system within ORNL’s MDF. Improvements will focus on automation of material handling throughout.
 - 1.1. Automating the Material Deposition
Investigate faster transfer speed for sheet material, eliminate errors
 - 1.2. Automated Stacking
Determine best practices on the
 - 1.3. System Integration
Preferred Slicing direction, location of overlap, etc.
2. Material Property Analysis
 - 2.1. Planning Material
Determine variations between Glass, CF, Kevlar mat, and Powder Polymer.
 - 2.2. Testing of Material Combinations
Prepare coupons specific to CTE, x-, y-, & z- Directional stress / strain analysis, overall dimensional characteristics, autoclave-ability
3. Results
 - 3.1. Communicate results
Determine feasibility
 - 3.2. Commercialization
Impossible Objects to Identify Commercialization Opportunities

References:

[1] "About - Impossible Objects," Impossible Objects. [Online]. Available at: <http://www.impossible-objects.com/about/#team>. [Accessed: 26-Apr-2016].

[2] "Impossible Objects \$2.8 M Composites - 3D Printing Industry." 3D Printing Industry Impossible Objects Secures 28 Million for Composites 3D Printing Comments. 2014. Web. 26 Apr. 2016.

[3] "Impossible Objects \$2.8 M Composites - 3D Printing Industry." 3D Printing Industry Impossible Objects Secures 28 Million for Composites 3D Printing Comments. 2014. Web. 26 Apr. 2016.

[4] "CRADA No. NF-15-05698, Appendix A"

[5] "Impossible Objects." Impossible Objects. Web. 26 Apr. 2016.

[6] "Blooming on Polymers." Tascon -. Web. 26 Apr. 2016.

[7] Oak Ridge National Lab ORNL/TM- etc. Coefficient of Thermal Expansion of Materials for Large Scale Polymer Additive Manufacturing – Test Report, G. Velez-Garcia, A. Wright, V. Kunc, C. Duty, March, 2014

[8] "Overview of materials for Polyetheretherketone, Unreinforced," Overview of materials for Polyetheretherketone, Unreinforced. [Online]. Available at: <http://www.matweb.com/search/datasheet.aspx?matguid=2164cacabcde4391a596640d553b2ebe>. [Accessed: 26-Apr-2016].

[9] "Overview of materials for Polyetheretherketone, Carbon Fiber Filled," Overview of materials for Polyetheretherketone, Carbon Fiber Filled. [Online]. Available at: <http://www.matweb.com/search/datasheet.aspx?matguid=e0993de8cfa74798876b7883382af4dd>. [Accessed: 26-Apr-2016].